


Specification



Capacity	(tonnes)	3.2	5	7.5	10	15	20	
Product No.	—	H1CB032	H1CB050	H1CB075	H1CB100	H1CB150	H1CB200	
No. of Fall	—	1	1	3	3	6	10	
Load Chain	(mm)	10×30	10×30	10×30	10×30	10×30	10×30	
Pull to Rated Load	(N)	360	296	312	328	345	328×2	
Proof Load	(tonnes)	4.8	7.5	11.25	15	22.5	25	
Hand Chain	(mm)	5×25×18						
Lift	(m)	3	3	5	5	5	5	
Net Weight	(kg)	31	45	76.5	99	157	209	
Gross Weight	(kg)	32.5	46.5	78.5	109	170	223	
Extra Wt.Per m	(kg)	3.2	5.3	7.4	9.6	14	18.3	
Change from High Speed to Standard Speed	(kg)	>55	>110	>165	>165	>330	>440	
Change from Standard Speed to High Speed	(kg)	<25	<50	<75	<75	<150	<200	
Pulling Hand Chain to Lift 1m	High Speed	(m)	27	54	81	108	162	108×2
	Standard Speed	(m)	135	270	405	405	816	544×2
Dimensions	a	(mm)	247	247	247	247	275	285
	b	(mm)	227	275	366	358	485	648
	c	(mm)	68.5	133	120	263	110	286
	d	(mm)	38.5	64	70	95	168	123
	e	(mm)	43	51	64	64	80	82
	f	(mm)	49.5	60	85	85	100	110
	g	(mm)	62	79	—	—	—	—
	h	(mm)	465	600	740	760	1000	1150

HIDAX Co.,Ltd

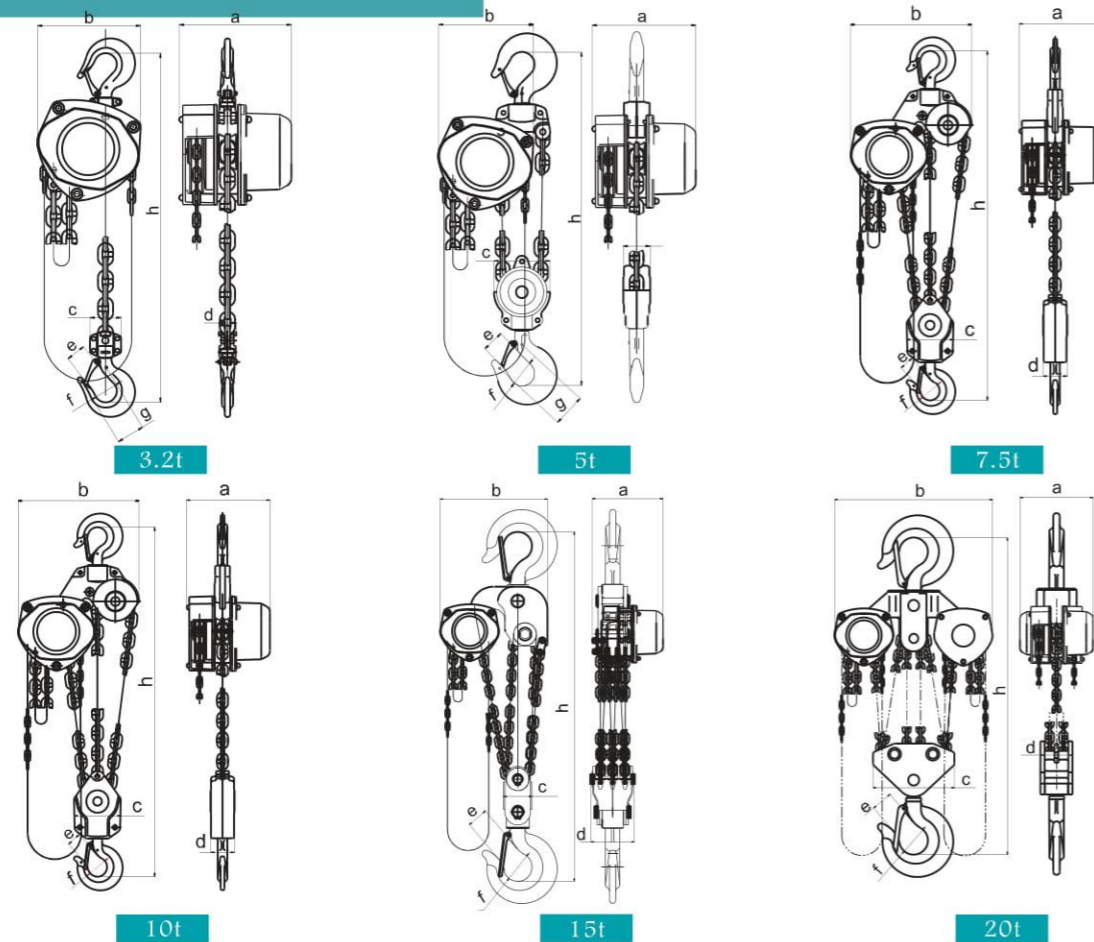

Made in Japan

20 t

HIDAX Co.,Ltd

307 YOKOHAMA TH BRDG.,1-2 CHITOSE-CHO NAKA-KU YOKOAHAM JAPAN 231-0035

Tel : +81-45-326-6336 Fax : +81-45-326-6338

Email : sales@hidax.co.jp HP: <http://www.hidax.co.jp/>

Manual Chain hoist
with Dual Gear system

Dual Gear Speed Chain Hoist

5 times faster **Made in Japan**

- Equipped with load-sensing automatic transmission
- The chain hoist can lift and lower the load chain 5 times faster than the regular chain hoist when it doesn't have load.
- Overload control function to ensure safety
- Smooth switching between high-speed and normal gears
- Adopt the highest quality/highest strength (grade 100) alloy steel chain.
- Equipped with a highly reliable reinforced two-stage claw-type brake function.
- JIS B 8802 standard
- The latest technology patented in the U.S., Canada, Germany, Australia, Japan, China, Korea, and Taiwan.



3.2 t



5 t



7.5 t



10 t



15 t



20 t